


Decking Screw

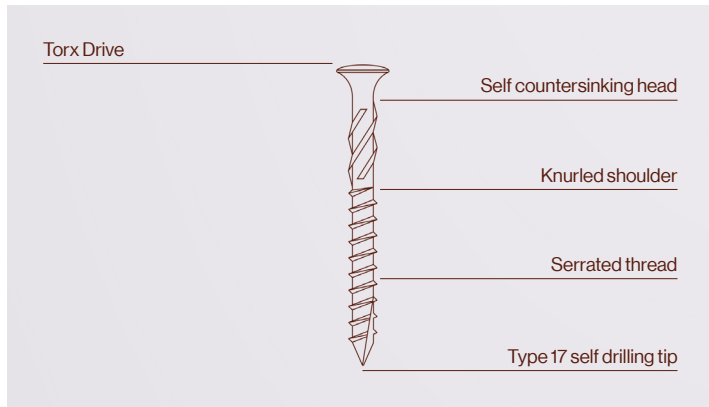

Features

Overview

Abodo's Decking Screw is the latest design in exterior wood screw technology, allowing easy fixing, superior hold and maximum durability.

Uses: Exterior timber decking, cladding, screening, balustrade, pergolas. Suitable for areas near the sea or exposed to salt spray.

Size: 5.5mm (11g) x 60mm.

Specification: Marine Grade Stainless Steel 316 (A4).

Benefits:

- Torx drive head gives stronger driver hold and reduces blow out during installation.
- Self countersinking head eliminates need for pre-drill countersink and gives a superior clean finish.
- Knurled shoulder expels dust out of the drive hole for easier application.
- Serrated thread gives cleaner cutting action and enhanced driving power.
- Type 17 tip makes the screw self-drilling into softwood and many other timbers, and that means reduced installation time.

Application:

- Drive screws with an electric drill, set to screw driving mode or an electric screw driver at slow speed.
- Do not use an impact driver as this will over drive the screw.
- Use the torx drive bit included in each box.
- Adjust clutch so that the base of the screw head sits just below the timber surface.
- Ensure a minimum of 30mm penetration of screw into timber substrate.

Packaging: Boxes of 100 pcs with one torx drive bit each. Outer carton containing 10 boxes.

P +64 9 249 0100
E info@abodo.co.nz
W abodo.co.nz